


CAR REFRIGERATOR

User Manual

SKU: CF020-10BL-USEH



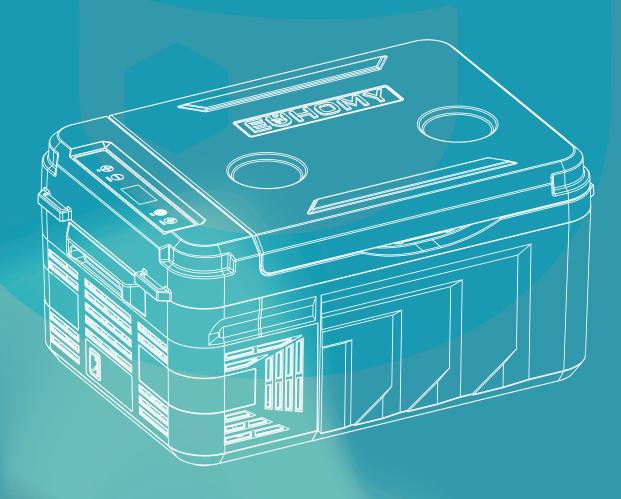

Congratulations

Dear Customer:

Welcome to the Euhomy family. Thank you for purchasing one of our products.

Our goal is to provide you with superior service. If there is anything missing from or wrong with your order, or if you have any questions about using our car refrigerator, PLEASE contact us.

Email: support@euhomy.com Facebook: @Euhomy.Official

The Euhomy team is available 24/7 to address your questions, comments, and concerns. Your satisfaction is our ultimate goal. We want to make everything right so you'll share your positive experience with other shoppers on Amazon.

If you experience any problems, please send an email to support@euhomy.com.

Our mission:

- * To be the most trusted appliance brand.
- * To create practical, compact appliances that better your life.

Be sure to register at

www.euhomy.com/register

for updates, warranty, and other relevant information.











CONTENTS

1 Safety instruction	1
1.1 General safety	1
1.2 Operating the cooling device safety	1
2 Cooling device application.	2
3 Cooling device Function.	2
4 Display elements and operation.	3
4.1 Display & control panel	3
4.2 Cooler device switch on/off	3
4.3 Cooling temperature setting	3
4.4 Low voltage protection battery monitor setting	3
4.5 Cooling device working mode setting	4
4.6 The explanation for the running code shown in the display screen	4
4.7 Energy saving tips	5
5 Connecting the cooling device.	5
5.1 Using the fused DC plug for device connection	5
5.2 Connect to an AC power supply	6
6 Using the cooling device.	6
6.1 Switch on the cooling device	6
6.2 Switch off the cooling device	7
6.3 Defrost the cooling device	7
7 Cleaning and Maintenance.	7
7.1 Replacing the DC plug fuse	7
7.2 Cleaning the cooling device	7
8 Guarantee.	8
9 Troubleshooting.	8
10 Disposal.	9
11 Technical data.	9
12 APP Connection	1/

SAFETY INSTRUCTIONS

1.1 General Safety

WARNING!

- > Do not operate the cooling device if it is visibly damaged.
- ➤ If this cooling device's power cable is damaged, it must be replaced by the customer service in order to prevent safety hazards.
- This cooling device may only be repaired by qualified personnel, improper repair can lead to considerable hazards.
- > Cleaning and user maintenance must not be carried out by children without supervision.
- > Children must be supervised to ensure that they do not play with the cooling device.
- Always keep and use the cooling device out of the reach of children under age of 8 years.
- ➤ Do not store any explosive substances such as spray cans with a flammable propellant in the cooling device.

CAUTION!

- Disconnect the cooling device from the power supply:
 - --- before each cleaning and maintenance.
 - --- after every use
- Food may only be stored in its original package or in suitable containers.

NOTICE!

- ➤ Check that the voltage specification on the rating label corresponds to that of the power supply.
- ➤ Only connect the cooling device as follows:
 - --- Connect the DC cable to a DC power supply in the vehicle.
- Never pull the plug out of the socket by the cable.
- > If the cooling device is connected to the DC outlet, disconnect the cooling device and other power consuming devices from the battery before connecting a quick charging device.
- If the cooling device is connected to the DC outlet, disconnect the cooling device or switch it off when you turn off the engine. Otherwise you may discharge the battery.
- ➤ The cooling device is not suitable for transporting caustic material or material contains solvents.
- ➤ The insulation of the cooling device contains flammable cyclopentane and requires special disposal procedures. Deliver the cooling device at the end of its life-cycle to an appropriate recycling.

1.2 Operating the cooling device safety.

CAUTION!

Before starting the cooling device, ensure that the power supply line and the plug are dry.



NOTICE!

- > Do not use electric device inside the cooling device unless they are recommended by the manufacturer for the purpose.
- > Do not place the cooling device near naked flames or other heat sources (heaters, direct sunlight, gas ovens etc.)
- Danger of overheating!
 - Ensure at all times that there is sufficient ventilation so that the heat arises during operation does not build up. Make sure the cooling device is sufficiently far away from walls and other objects so that the air can circulate.
- Ensure that the ventilation openings are not covered.
- > Do not fill the inner container with ice or fluid.
- > Do not immerse the cooling device into the water.
- Protect the cooling device and the cable against heat and moisture.

COOLING DEVICE APPLICATION

The cooling device is designed to be operated from:

- > a DC on-board power supply from a vehicle, boat or caravan.
- > a DC auxiliary battery

The cooling device is intended to be used in household and similar application such as

- > Staff kitchen areas in shops, offices and other working environments.
- > Farm houses
- > Clients in hotels, motels and other residential type environments.
- Bed and breakfast type environments.

CAUTION! Health hazard!

Please check if the cooling capacity of the device is suitable for storing the food or medicine you wish to cool.

COOLING DEVICE FUNCTION

The cooler device can refrigerate or freeze food products. A fast-acting and efficient cooling system provides maintenance-free cooling performance with a compressor and control module. The cooling device is designed for mobile use and it can be used in the various harsh condition and situation.

Function description:

- > 3-level battery monitor for protecting the vehicle battery.
- Display with temperature gauge (switch off automatically at low battery voltage)
- > Temperature adjustment (with two buttons in step of 1°C or 1°F).




DISPLAY ELEMENTS AND OPERATION

NOTICE!

- After buying your new cooling device, please lay the new cooling device horizontally for more than 24 hours before starting.
- ➤ Before staring your new cooling device for the first time, your should clean it inside and outside with a damp cloth for hygienic reasons. Please also refer to the chapter "Cleaning and Maintenance".

4.1 Display & control panel:

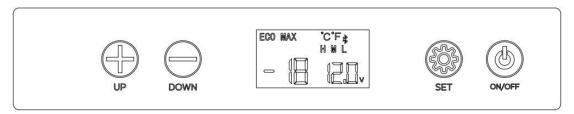

4.2 Cooler device switch on/off:

- **Switch on**: Long press the button "ON/OFF" for about three seconds...
- **Switch off:** Long press the button "ON/OFF" for about three seconds.

Note: When connected to power, the digital display screen will flash for 2 seconds and enter into normal working mode.

4.3 Cooling temperature setting:

- Switch on the cooling device.
- Select temperature display unit: Short press the button "SET" for the third time to select the temperature unit "°C" or "°F"(representing "Celsius" or "Fahrenheit") with the button "Up" and "Down". The selected temperature will appear and flash in the display screen for a few seconds, and then the display screen will return to display the current temperature.
- ➤ Single Zone temperature setting: Press the button "Up" and "Down" to change the temperature. The temperature can be set within the range of -20°C(-4°F) to 20°C(68°F) for each separate zone in 1°C or 1°F.

4.4 Low voltage protection battery monitor setting:

The cooling device is equipped with a 3-level battery monitor which protects your vehicle battery against excessive discharging when the device is connected to the on-board DC supply.

If the cooler is operated when the vehicle ignition is switched off, the cooler switches off



automatically as soon as the supply voltage falls below a set level. The cooler will switch back on once the battery has been recharged to the restart voltage level.

NOTICE! Danger of damage!

When switched off by the battery monitor, the battery will no longer be fully charged. Avoid starting repeatedly or operating without longer charging phases. Ensure that the battery is recharged.

In "High" level, the battery monitor responds faster than at the level "Low" and "Medium".

Monitor Level		Low	Medium	High
12V	Switch-off voltage	8.5V	10.4V	11.1V
	Restart voltage	10.9V	11.7V	12.4V
24V	Switch-off voltage	21.3V	22.8V	24.3V
	Restart voltage	22.7V	24.2V	25.7V

When the cooler is supplied by the started battery, select the battery monitor level "**High**", if the cooling device is connected to a supply battery, the battery monitor level "**Low**" will suffice.

- > Switch on the cooling device.
- There are 3-level low voltage protection battery monitor setting: Low, Medium and High. Touch the button "SET" twice there will be flashing "L" or "M" or "H" appear in the display screen, touch the button "UP +" or "DOWN -" to select the battery monitor level "L" or "M" or "H" to protect your vehicle battery. The selected monitor level "L" or "M" or "H" will flash in the display screen for a few seconds after setting, the display flashes several times before it returns to display the current temperature.

4.5 Cooling device working mode setting:

Cooling device working mode selection:

There are two working modes in the device:

Touch the button "set", there will be flashing letter "ECO" or "MAX"

display in the screen, use the button "UP+" and "DOWN -" to select the mode you what. The working mode letter "ECO" or "MAX" will flash in the screen for 5 seconds, and then the display screen will return to display the current temperature.

4.6 The explanation for the running code shown in the display screen:

Error Code	Possible Reason	Suggested Solution
LL	Sensor circuit is broken or short	Connect or replace the sensor



E1	Input voltage is low	Check the battery voltage or adjust the	
	Input voltage is low	Battery Monitor Level.	
E2	Ventilating fan problem	Check if the ventilating fan is blocked or	
		short circuit.	
E3	Compressor started self-protection	Disconnect the device from power supply	
		for 30 minutes, and re-start the device.	
E4	Compressor protect itself against	Change the working mode by device control	
E4	unusual running speed.	panel	
E5	Control panel's overheating	Move the device to a place with	
	warning	well-ventilated installation environment.	

4.7 Energy saving tips:

- Choose a well-ventilated installation location which is protected against direct sunlight.
- Allow warm food to cool down first before placing it in the cooling device to keep cool.
- > Do not open the cooling device more often than necessary.
- > Do not leave the cooling device open for longer than necessary.
- > Defrost the cooling device once a layer of ice forms.
- Avoid unnecessary low temperature.

CONNECTING THE COOLING DEVICE

WARNING! DC extension cord.

- ➤ Because of the potential safety hazards under certain conditions, the manufacturer does not recommend using any type of DC extension cord.
- > Under no circumstance should you attempt to splice extension cord wires.
- > Do not use power strips or two-way splitter.
- Always unroll or uncoil a DC cord to avoid heat retention and possible melting.

Connecting to a battery (vehicle or boat), the cooler can be operated with DC 12V or 24V.

NOTICE! Danger of damage!

Disconnect the cooler and other consumer units from the battery before you connect the battery to a quick charging device.

Over-voltage can damage the electronic of the cooling device.

For safety reason, the cooling device is equipped with an electronic system to prevent polarity reversal. This protects the device against short-circuiting when connecting to a battery.

5.1 Using the fused DC plug for device connection.

NOTICE! Danger of damage!



For protection of the device, the DC cable supplied includes a fuse inside the plug.

- ➤ Plug the DC cable into the cooling device DC power supply inlet.
- Connect the DC cable to the DC power supply outlet.

5.2 Connect to an AC power supply.

- ➤ Plug the DC cable into the cooling device DC power supply inlet.
- Connect the DC cable to the cigar lighter socket of an AC adaptor (AC adaptor is optional sale products).
- Connect the AC cable of the AC adaptor to the AC power supply outlet.

NOTICE! Danger of damage!

- > Only use the DC cable supplied from the manufacture.
- > Never handle plugs and switches with wet hands or if you are standing on a wet surface.
- > If you are operating your cooler on board of a boat from a power supply 120V, you must install a residual current circuit breaker between the 120V AC power supply and the cooler. seek advice from a trained technician.

USING THE COOLING DEVICE

6.1 Switch on the cooling device.

NOTICE! Danger of overheating!

Ensure at all time that there is sufficient ventilation so that the heat which generated during the operation can dissipate. Ensure that the ventilation slots are not covered. Make sure that the device is sufficiently far away from walls and other object so that the air can circulate.

- Place the cooler on a firm foundation.Make sure that the ventilation slots are not covered and that the heated air can dissipate.
- Close the cooling device.
- Switch on the cooler.

NOTICE! Danger from excessively low temperature!

Ensure that the only those objects are placed in the cooler that are intended to be cooled at the selected temperature.

NOTE!

The temperature displayed in the screen is that of the middle in the interior.

The temperature elsewhere can deviate from this temperature.



6.2 Switch off the cooling device.

- Empty the cooler.
- Switch off the cooler.
- > Pull out the DC connection cable from the socket.

If you do not want to use the cooling device for a longer period of time.

Leave the device cover slight open, this will prevents odour build-up.

6.3 Defrost the cooling device.

Humidity can form frost in the interior of the cooling device or on the vaporiser, and this will reduce the cooling capacity of device. Defrost the cooling device in good time to avoid this.

NOTICE! Danger of damage!

Never use hard or pointed tools to remove ice or to loosen objects which have frozen in the cooler.


Process the following step to defrost the cooler

- > Take out the contents of the cooler.
- If necessary, place them in another cooling device to keep them cool.
- > Switch off the device.
- Leave the cover open.
- Wipe off the defrosted water.

CLEANING AND MAINTENANCE

7.1 Replacing the DC plug fuse.

- > Pull off the adaptor sleeve from the DC plug.
- Unscrew the screw out of the upper half of the housing.
- Carefully raise the upper half of the housing from the lower half.
- > Take out the contact pin.
- Replace the detective fuse with a new fuse with the same type and rating
- Re-assemble the plug in the reverse order.

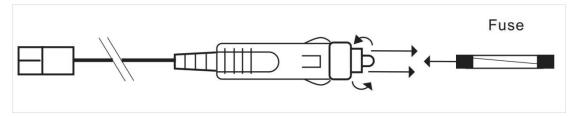

7.2 Cleaning the cooling device.

> Occasionally clean the device interior and exterior with a damp cloth.



Make sure that the air inlet and outlet vents in the device are free of any dust and dirt, so that heat can be released and the device is not damaged.

WARNING!

Always disconnect the device from the power supply before you clean and service it.

NOTICE! Risk of damage.

- Never clean the cooler under running water or in dish water.
- Do not use abrasive cleaning agents or hard objects during cleaning as these can damage the cooler

GUARANTEE

If the product is defective, please contact the supplier in your country or your retailer.

For repair and guarantee processing, please include the following documents when you send in the device.

- A copy of the receipt with purchasing date.
- A reason for the claim or description of the fault.

TROUBLESHOOTING

Fault	Possible cause	Suggested remedy
	No voltage was detected in the DC	In most vehicles the ignition must
	power supply.	be turned on before power supplied
Device does not function, LED light		to the DC power outlet.
does not glow.	The cooling device plug fuse is	Replace the device plug fuse by a
	defective	new one.
The device does not cool (plug is	Defective compressor	This can only be repaired by an
inserted, "ON" LED is lit)		authorized repair center.
The device does not cool (plug is	Low voltage protection battery	Select a lower level for battery
inserted, display screen shows	monitor is set too high.	monitor
Error Code"E1"). Please also refer		
to chapter "4.7The explanation for	Battery voltage is too low.	Test the battery and charge it if
the running code shown in the		needed
display screen":		
		If the plug of your device becomes
	The DC outlet is dirty, this result in	very warm in the DC outlet, either
	a poor electric contact.	the DC outlet must be cleaned or
		the plug has not been assembled
When operating the device from		correctly.
DC outlet. (the ignition is on, but		Replace the fuse in the DC plug,
the device is not work, the LED	The fuse of the DC plug has blown.	please refer to the chapter "7.1
light is not on either)		Replacing the DC plug fuse."



		Replace the vehicle's DC outlet
	The vehicle fuse has blown	fuse, please refer to your vehicle's
		manual
The display screen shows the Error		
Code and the vehicle does not cool.	Please refer to "4.7The	This should only be repaired by an
Please refer to "4.7 The	Explanation for the running code	authorized repair center.
explanation for the running code	shown in the display screen"	
shown in the display screen"		

DISPOSAL

- Place the packaging material in the appropriate recycling waste bins wherever possible.
- If you wish to finally dispose your device, ask your local recycling center or specialist dealer for details about how to do this in according with the application disposal regulations.

TECHNICAL DATA

NOTE.

The coolant circuit contains R134a.

Contains fluorinated greenhouse gases.

Hermetically sealed equipment

	K-10A
Connection Voltage:	DC 12V/24V
Related current:	4.2A/12V 2.1A/24V
Cooling capacity:	+20°C (-4°F) to -20°C (68°F)
Volume:	10L
Climate class:	SN N ST T
Refrigerant quantity:	23g
Power consumption:	50W
Refrigerant:	R134a
Insulation:	Polyurethane
Cooling System:	Compressor

(Note: Owing to the advancement, the data might be changed. Please refer to the information on data plate as standard)

Warning: When used on car, the fridge's voltage protection level must be reset to the middle.



APP Connection



WIFI MODEL:

To download the "Euhomy" app, either scan the QR code with your smartphone or search for it on the App Store or Google Play.

PREPARATION BEFORE USE:

- 1.Download the **"Euhomy"** app from the App Store or **Google Play™.**Please not to authorize the app to access network and location services.
- 2.If this is your first time using the app, click the "Sign up" button to register. Otherwise, click the "Log in" button.
- 3. For better Bluetooth connection, please reset the product before using it for the first time. To do this turn on your car refridgerator. In run mode long-press " " and " " on the control panel of the refrigerator for 10 seconds and wait to hear one beep.
- 4. Ensure that the Bluetooth function on your mobile phone is enabled; Otherwise, the device will not be automatically searched.

Add Device

I.To add a device, from the Home Page, press "Add Device" or press " in the top right corner of the screen. (If you already have a device added to your account, the "Add Device" button will not appear.)

- 2.Connecting
- Auto-connect: (Recommended method)

The app will automatically search for the device when Bluetooth is turned on, and you can add the corresponding product directly from the automatic search.

- Step 1: Press "Add Device" or click the "
 "button.
- Step 2: When the device is found, click "Add". Make sure that the Bluetooth function is enabled during this process.
- Step 3: Wait for the connection and click "Done".
- Step 4: Once the device is added, you can use the app's menu to change the name and location of the device.



• Manual connection: Select your model from the device menu.

- Step 1: In run mode, press and hold " (" and " (" buttons on the control panel of the 10 seconds and wait for one beep.
- Step 2: Press "Add Device" or click the "

 "button.
- Step 3: Select the corresponding product type and click the product diagram of the corresponding model.
- Step 4: Click"Done". Your smartphone will automatically connect.
- Step 5: Once the device is added, you can use the menu of the app to change the name of the device.

Follow the instructions step by step in the app interface, which provides detailed operation reminders;

NOTE: The Connection process may take up to 60 seconds.

- *Once the device is added, you can use the app's menu to change the device's name.
- *When you finished, press "Done".

NOTE: Make sure your mobile device is opening Bluetooth.

BLUETOOTH MODE:

Bluetooth function can be used in non-wifi environment.

NOTE:

After disconnecting, please wait for approximately 2–3 minutes before using the Bluetooth control directly.


Using the My App

You can set the "LOCK" feature and the refrigerator switch.

Click on "more features" in the lower right corner to access the settings for temperature unit.





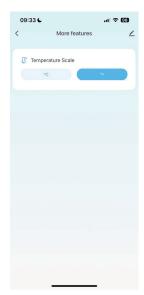

Unbinding Instructions

A car refrigerator can only be connected to one mobile phone.

First method: You can disconnect the connection by following these steps:

In run mode.

Simultaneously long-press the "" and "" buttons on the control panel of the refrigerator for 10 seconds until you hear one beep.

Second method: Removing connection with the app:

- 1. Open the app and go to the device page.
- 2.Click " / " in the upper right corner
- 3. Then click "Remove Device" at the bottom.

Cautions

- *There might be a delay of approximately 1–3 minutes when operating the machine through the mobile phone, please be patient.
- *The language of the APP automatically switches according to the language of the mobile system.
- *You can lock or unlock the control panel on the refrigerator by using the app's lock icon. Please note that if you want to lock the refrigerator, it should be controlled through the app as the operation panel of the refrigerator does not have the locking and unlocking function.





TIPS AND SUGGESTIONS



euhomy.com/chat



support@euhomy.com







